



AQUA PUR

Traitement Des Eaux

CATALOG 3



Info Sheet VALVES and ACCESSOIRES part 1

AUTOTROL

PEANUT



Logix 255



Performa 268



Performa CV 278



Magnum CV 298



Please contact us for more information or
Prices for complete softening units with Autotrol valves

CLACK



CAPPERS




SCA 19 Softener – chlorination model
meter control

FOR HOT WATER USE !



M ultiplex

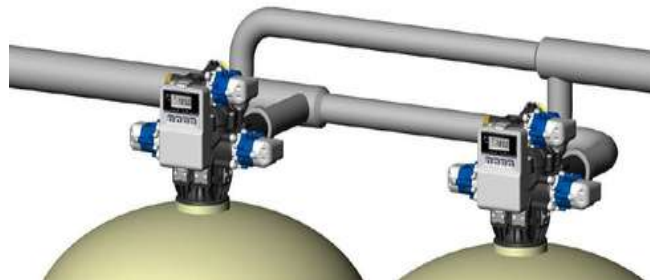

Bypass



Kit - Plastic connector 3/4"



Kit plastic connector 3/4" with
analysis taps



Elbow multi position connector 1" BSP



Brass connector 3/4" female



4" Threaded tank adaptor

ERIE



541D / 542D
Electromechanical



541 T
Electronic



541 N
Electronic



2400 /
2401
Electronica
|



24
01D
Dup le
x

**Please contact us for more information or
Prices for complete softening units with Erie valves**



WATA

The WATA valve : for tank sizes from 6" to 13"
Service and backwash flow rate : 3,2 m³/H @ 1 bar drop
Brine tank refill with soft water
Available with proportional brining
Possibility for customization



WATA valve with Timer Touch screen remote system



Advantage Remote :

- Working device can be watched online
- Changes can be made online
- Calculation Salt consumption between two refills ...
- Routing for repairs, maintenance and salt delivery can be optimized (fin. advantage)
- Professional has a perfect overview of his customer equipment and status of device



Bypass WATA



WATA

WATA VALVES

Article number	Valve	System type	Connection	Euro
0608.FER27-CHR	FER27	Downflow time clock	1	248,2
0608.FER27-CHR-UF	FER27	Upflow time clock	"	1
0608.FER27-ECO-VB-UF	FER27	Upflow metered with Variable Brining	1 "	248,2 1
0608.FER27-TOUCH	FER27	Touchscreen with remote system	1 1" "	297,0 371,83

Included in the price of the valve :

- Top distributor
- Bottom distributor
- DLFC and Injector (to specify with order)
- Adapter 220V/12V
- John Guest fitting for brine connection


WATA OPTIONS

Article number	Description	Euro
0608.BYPASS	Bypass	28,7
0603.CHLOR01	External chlorinator 3/8"	5 82,5 0

3 screw to disassemble
for maintenance or re-
pairs on the valve


A solid and state of the
art motor, that runs
silently

Valve body in Noryl

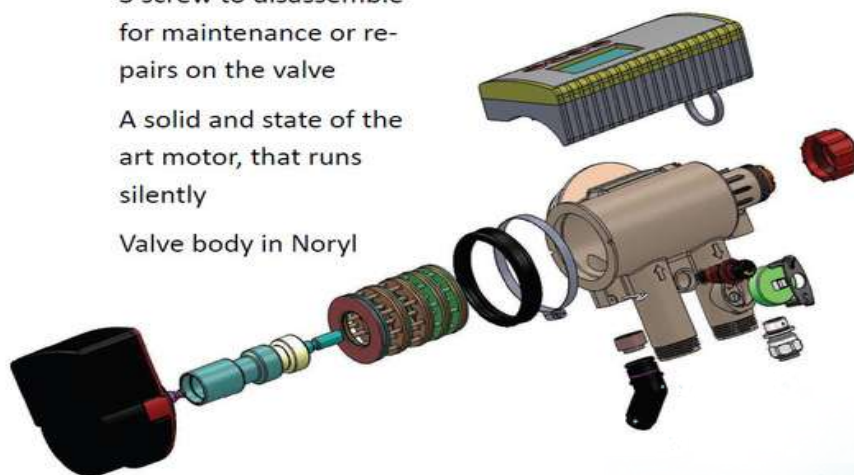

CONDUCTIVITY METERS

BEHR

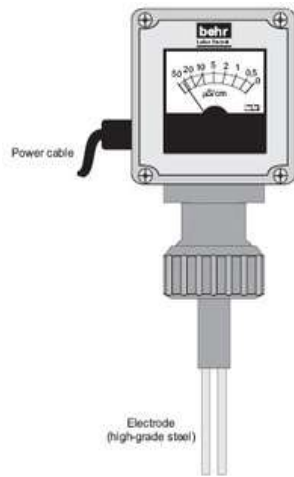

LFD Conductivity meter

HEYL NEOMERIS





Testomat® 808

Indicator type*	Colour change at a limit value of
300	0.02°dH = 0.4ppm CaCO ₃ = 0.04°f residual hardness
300 S	0.05°dH = 0.9ppm CaCO ₃ = 0.09°f residual hardness
301	0.1°dH = 1.8ppm CaCO ₃ = 0.18°f residual hardness
302	0.2°dH = 3.6ppm CaCO ₃ = 0.36°f residual hardness
303	0.3°dH = 5.4ppm CaCO ₃ = 0.54°f residual hardness
305	0.5°dH = 9ppm CaCO ₃ = 0.9°f residual hardness
310	1°dH = 18ppm CaCO ₃ = 1.8°f residual hardness
320	2°dH = 36ppm CaCO ₃ = 3.6°f residual hardness
330	3°dH = 54ppm CaCO ₃ = 5.4°f residual hardness

testomat® ECO



testomat® 2000



Unit	Parameter/Indicator type			
	Water hardness			
	TH 2005	TH 2025	TH 2100	TH 2250
°dH (resolution)	0.05 - 0.50 (0.01)	0.25 - 2.50 (0.05)	1.0 - 10.0 (0.2)	2.5 - 25.0 (0.5)
°f (resolution)	0.09 - 0.89 (0.02)	0.45 - 4.48 (0.1)	1.8 - 17.9 (0.4)	4.5 - 44.8 (1.0)
ppm CaCO ₃ (resolution)	0.89 - 8.93 (0.2)	4.5 - 44.8 (0.9)	18 - 179 (3.8)	45 - 448 (10)
mmol/l (resolution)	0.01 - 0.09 (0.002)	0.04 - 0.45 (0.01)	0.18 - 1.79 (0.04)	0.45 - 4.48 (0.1)



Info Sheet VALVES and ACCESSOIRES part 2

FLECK

RESIDENTIAL VALVES



Fleck 4600 Chrono



Fleck 5600 Eco



Fleck 5600 SE



Fleck 5600 SXT



Fleck 5800 SXT



Fleck 7700 SXT

INDUSTRIAL VALVES



Fleck 2750







Fleck 2850 Eco
with 20 m³
meter



Fleck 2910

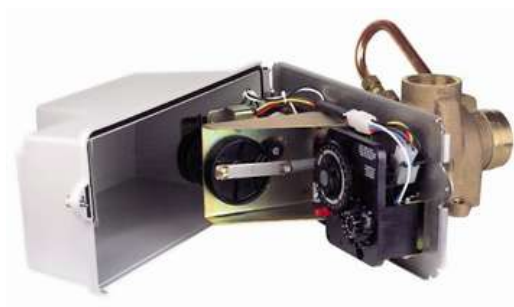

Fleck 3150

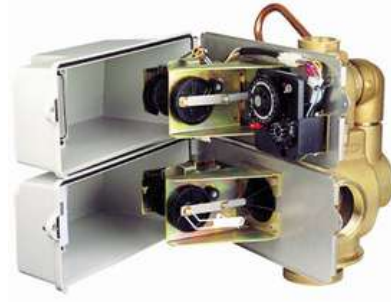

Fleck 3900

TWIN VALVES



Fleck 9100



Fleck 9000



Fleck 9500 Eco
with 40 m³
meter



Fleck 9100 SXT

DUPLEX VALVES

All DUPLEX-valves include:

*2 Valves
1 Remote meter
Wiring cables for a DUPLEX-system*

VALVE OPTIONS



Extended meter
PLASTIC



Drain Line Flow Controllers
(DLFC)



Kit In-line Meter
(Meter, Threaded connections and meter cable)
Polymer body with glass fiber
Ceramic bearing
Quick fittings

Meter range $\pm 5\%$ = 3,7 l/min up to 189 l/min

FLECK OPTIONS



Air-check # 500
 Air-check # 500HOT WATER
 Air-check # 900 HOT WATER

Yoke ¾" and 1" Male
 Connector 1" Male plastic for 7700 Valve



Bypass Plastic 26054

Bypass 7700 Valve 28356



Safety Brine Valves
 (from left to right) SBV 2300, SBV 2310, SBV 2350
 (without aircheck)



Distributor Assy
 Distributor AssyHOT WATER (right)

Kit copper tubes for 9500 Valve



No bypass water (NBP) pistons
 In case you do NOT want (hard)
 water during regeneration



SIATA

VALVES



V 132



V 240



V 230



V 250



V 260



V 360

CONTROLLERS



OPTIONS AND ACCESSORIES



Brine Valve



Bypass Direct



Bypass Remote



T-suction



No return Valve
(NaOH)



No return Valve
(HCl)

